NightSearcher

AC. LED Floodlight - Ecostar Range

The EcoStar floodlight range can be used for a fraction of the cost of halogen equivalents. They are suitable for all weather conditions and can be used to light small and large areas.

2 YEAR WARRANTY

With a 50,000 hour lifetime LED and very low power consumption these flood lights will dramatically reduce your electric bill. The EcoStar range is versatile, and can be mounted on walls or for use on a tripod.

AC Powered

10w, 30w, 50w, 100w, 200w options, mountable to a wall or a tripod. Operates from 85v to 265v AC.

Ecostar Innovation

Robust aluminium casing

SMD Technology

Toughened glass

Designed to meet IP65

Adjustable lighting angle

High performance heat sink



Single cabled version

Ecostar 10, 30, 50, 100 and 200

NightSearcher

- Mains powered LED lighting
- Adjustable bracket
- Weatherproof design
- Can operate on either: 110v - 240v
- Low heat emission no cool down before storage
- Compact design - smaller than fluorescent heads
- 500mm cable

2 YEAR WARRANTY

85v to 265v AC available

Optional extras: 14 Metre extension lead available (110v)

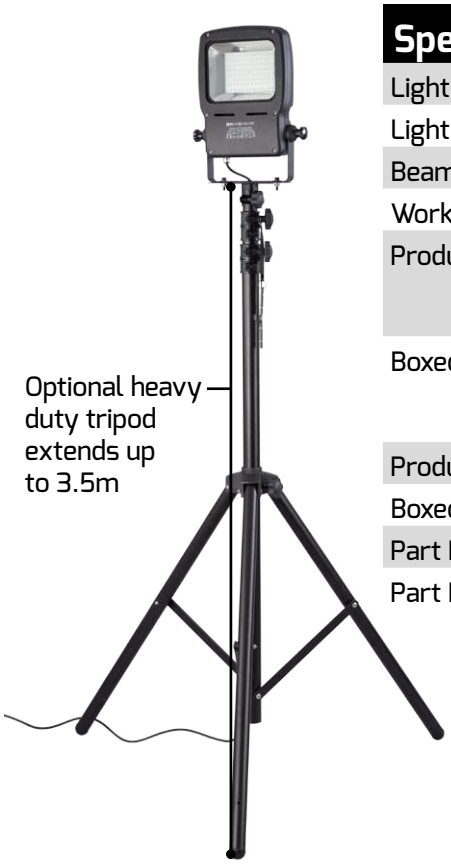

Specifications

Light Output Lumens	1,000	3,000	5,000	10,000	20,000
Light Source	10w LED	30w LED	50w LED	100w LED	200w LED
Beam Angle	120°	120°	180°	180°	180°
Working Voltage	85-265v	85-265v	85-265v	85-265v	85-265v
Product Size (mm)	(L) 206 (D) 150 (H) 49	(L) 251 (D) 169 (H) 66	(L) 375 (D) 255 (H) 93	(L) 375 (D) 255 (H) 93	(L)435 (D) 560 (H) 145
Boxed Size (mm)	(L) 210 (D) 210 (H) 53	(L) 260 (D) 250 (H) 75	(L) 390 (D) 290 (H) 145	(L) 390 (D) 290 (H) 145	(L) 450 (D) 580 (H) 200
Product Weight (kg)	1.1kg	2.25kg	4.75kg	4.75kg	8.2kg
Boxed Weight (kg)	1.16kg	2.4kg	5kg	5kg	8.5kg
Part No.	NSECOSTAR10	NSECOSTAR30	NSECOSTAR50	NSECOSTAR100	NSECOSTAR200
Part No. Linkable		NSECOSTAR30-110VLINKABLE	NSECOSTAR50-110VLINKABLE	NSECOSTAR100-110VLINKABLE	

Ecostar Linkables

30, 50 or 100w Linkable Ecostar

2 YEAR WARRANTY

AC Powered

- Compact durable construction
- Cool running
- White shadow free output
- Up to 60 units can be linked from one generator
- Designed to meet IP65 rating
- One third of the size of conventional linkable lighting

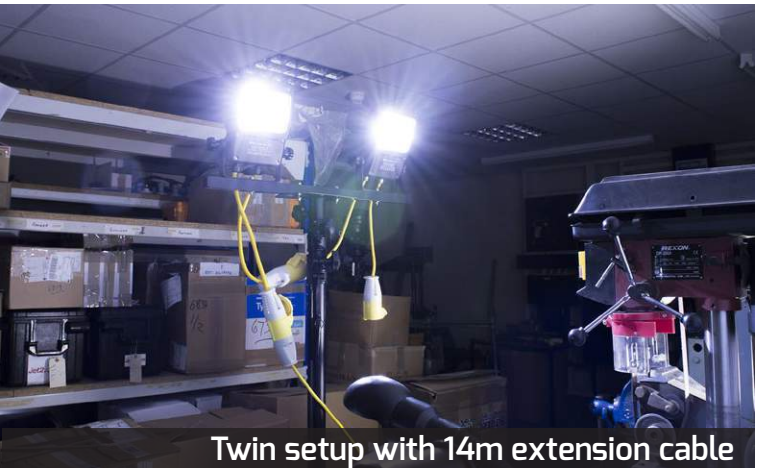

Twin setup with 14m extension cable

30w pictured

Tripod Options



BIR-TRIPOD
Max. (H) 1.7m
Suitable for: all 30w versions



SPTRIPOD1.9
Max. (H) 1.9m
Suitable for: all 30w, 50w and 100w versions



SPTRIPOD3.5M
Max. (H) 3.5m
Suitable for: all 30w, 50w and 100w versions

Package includes:
One linkable head
Tripod
500mm cable



Optional extras:
14 Metre extension lead available (110v Only)

Part No.	Dimensions
NSECOSTAR30-110VLINKABLE	(L)251, (D)169, (H)66
NSECOSTAR50-110VLINKABLE	(L)375 (D)255 (H)93mm
NSECOSTAR100-110VLINKABLE	(L)375 (D)255 (H)93mm
SPECOSTARTBAR	(L)420mm
SPCABLE14M	(L)14 Metres

Ecostar Twin Packages

30, 50 or 100w Twin Ecostar

2 YEAR WARRANTY

AC Powered

- 6,000, 10,000 or 20,000 lumens options
- 180 degree light spread
- 50,000hrs LED life span
- Compact design - Smaller than fluorescent heads
- High powered Epistar LED
- Ambient Temperature -25° + 50°
- Robust Aluminium casing
- Adjustable bracket
- Designed to meet IP65 rating
- Can operate on power sources between 85v - 265v
- 500mm cable
- C/W Tripod 1.5m - 3.5M

30w pictured

Package includes:
Two linkable heads
T - Bar
Tripod
500mm cable

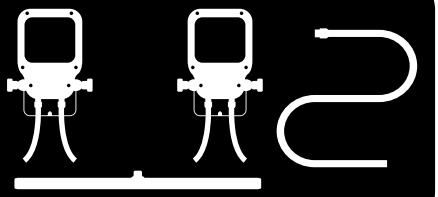

Optional extras:
14 Metre extension
lead available (110v Only)

Tripod Options

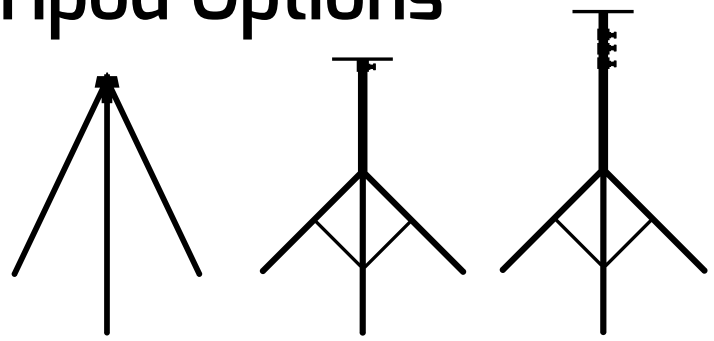

BIR-TRIPOD
Max. (H) 1.7m: 30w

SPTRIPOD1.9
Max. (H) 1.9m: 30w, 50w and 100w

SPTRIPOD3.5M
Max. (H) 3.5m: 30w, 50w and 100w

Twin setup with 14m extension cable

Part No.	Dimensions
NSECOSTAR30-110VLINKABLE	(L)251, (D)169, (H)66
NSECOSTAR50-110VLINKABLE	(L)375 (D)255 (H)93mm
NSECOSTAR100-110VLINKABLE	(L)375 (D)255 (H)93mm
SPECOSTARTBAR	(L)420mm
SPCABLE14M	(L)14 Metres